

Real Stone
Simplified

Installs
8x's Faster

INTERLOC

NATURAL STONE PANELS

Real Stone, Professionally Installed

Create professionally installed natural stone surfaces **8x faster** than traditional veneer systems.

Interloc Panel System (IPS) — Corners and panels work together seamlessly to create the appearance of a natural stacked stone wall. Our professionals select and shape each panel before they set it in mortar. They can be assembled quickly on any surface prepared for thin veneer installation.



Calculate Your Time & Cost Savings



Upfront costs aren't the whole story. Use the cost calculator to find your savings.



INTE
NATURAL ST





Berkshire



New England


Easy to Buy, Easy to Install

Natural stone is set into mortar and each panel is shaped so it can be assembled quickly on any surface prepared for thin veneer installation.

Full Panel Dimensions:	23 1/4" L x 8" H 118 SF Per Pallet
Half Panel Dimensions:	23 1/4" L x 4" H 59 SF Per Pallet
Corner Dimensions:	13 1/4" L x 8" H
Corner Returns:	7 1/4" 34LF Per Pallet

Improved Adhesion

Rough Backed surface aids in bonding for secure installation.

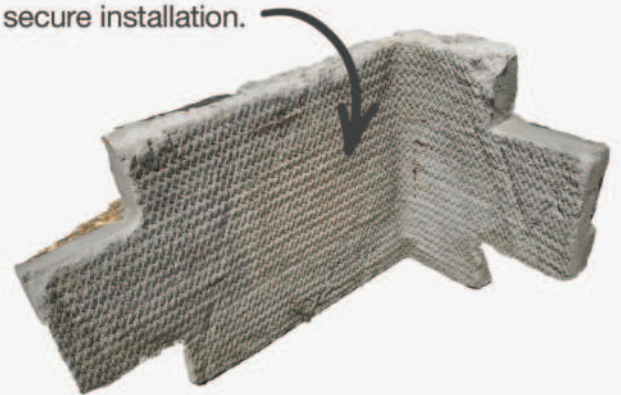

Because our panels meet the weight restrictions of natural thin veneer (<15lbs/SF) they can be installed with similar methods. We recommend using ARDEX X77™ (or equivalent) for setting the mortar. This mortar is a fiber reinforced polymerized blend that provides a sound and durable final installation. It also has the added benefit of filling joint aps by sliding the panel into the adjoining panel during installation.



instone

www.instoneco.com

sales@instoneco.com

708.371.0660

*Elevate your space
with effortless elegance.*