


PANGAEA®

THIN STONE VENEER

COLLECTIVE

3 COURSE ASHLAR

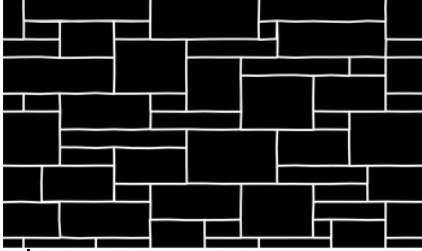


Ash Sandstone
Chinook Granite
Diamond River Quartzite
Kings Point Sandstone
Klondike Limestone
Lancaster Quartzite
Oxford Sandstone
Providence Granite/Quartzite
Saddleback Sandstone
Siena Sandstone

GripSet® Technology
Installation Ready™
Split Face

SPECIFICATIONS:

length: Up to 18" (≈ 457 mm)
heights: 2-1/4", 5", 7-3/4" ($\approx 57, 127, 197$ mm)
thickness: Average 1-1/4" (≈ 32 mm)
weight: Up to 13 lbs/ft² (≈ 63 kgs/m²)
corners: Available

4 COURSE ASHLAR FORMFIT

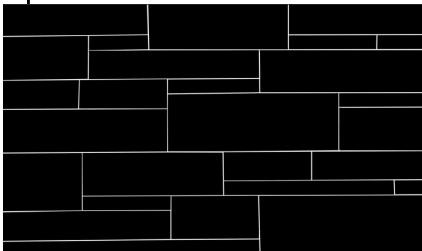


Ash Sandstone
Broadway Granite
Chinook Granite
Diamond River Quartzite
Kings Point Sandstone
Klondike Limestone
Lancaster Quartzite
Oxford Sandstone
Providence Granite/Quartzite
Saddleback Sandstone
Yukon Marble

GripSet® Technology
Installation Ready™
Sawn Cut 4 Sides FormFit

SPECIFICATIONS:

length: Up to 24" (≈ 610 mm)
heights: 2", 4", 6", 8" ($\approx 51, 102, 152, 203$ mm)
thickness: Average 1-1/4" (≈ 32 mm)
weight: Up to 13 lbs/ft² (≈ 63 kgs/m²)
corners: Available

ATLAS STRIP

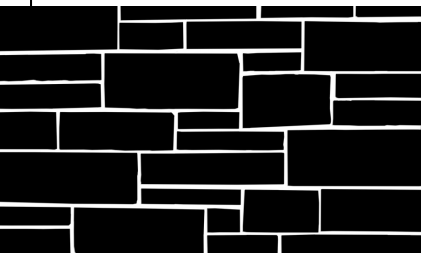


Cambrian Sandstone
Chinook Granite
Copper Canyon Sandstone
Grigio Sandstone
Lancaster Quartzite
New England Schist
Providence Granite/Quartzite
Tuscan Sandstone
WestCoast® Quartzite

GripSet® Technology
Installation Ready™
Split Face

SPECIFICATIONS:

length: Up to 24" (≈ 610 mm)
heights: 4"-8" ($\approx 102 - 203$ mm)
thickness: Average 1-1/8" (≈ 28 mm)
weight: Up to 13 lbs/ft² (≈ 63 kgs/m²)
corners: Available

CASTLESTONE

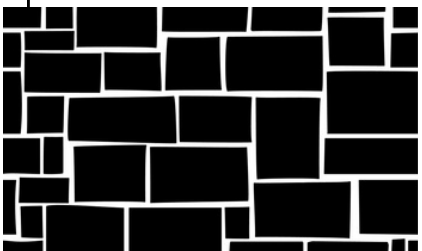

Black Rundle Limestone
Cambrian Sandstone
Copper Canyon Sandstone
Providence Granite/Quartzite
WestCoast® Quartzite

GripSet® Technology
Installation Ready™
Split Face

SPECIFICATIONS:

length: Up to 18" (≈ 457 mm) plus fillers
heights: Up to 12" (≈ 305 mm) plus fillers
thickness: Average 1" (≈ 25 mm)
weight: Up to 13 lbs/ft² (≈ 63 kgs/m²)
corners: Available

PANGAEA®

THIN STONE VENEER

COLLECTIVE

FIELDSTONE



Cambrian Sandstone
Chinook Granite
Copper Canyon Sandstone
Grigio Sandstone
Lancaster Quartzite
Providence Granite/Quartzite
Sierra Ridge Schist
WestCoast® Quartzite

GripSet® Technology
Installation Ready™
Split Face

SPECIFICATIONS:


size of stone: Up to 1-1/2 ft² (≈ 0.14 m²) plus fillers

thickness: Average 1" (≈ 25 mm)

weight: Up to 13 lbs/ft² (≈ 63 kgs/m²)

corners: Available

LEDGESTONE

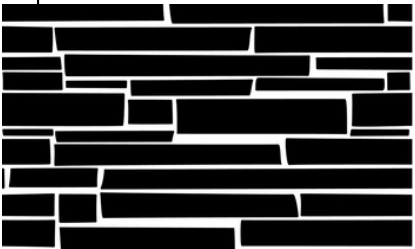

Black Rundle Limestone
Cambrian Sandstone
Chinook Granite
Copper Canyon Sandstone
Grigio Sandstone
Kings Point Sandstone
Lancaster Quartzite
New England Schist
Providence Granite/Quartzite
Tuscan Sandstone
Westcoast® Quartzite

GripSet® Technology
Installation Ready™
Split Face

SPECIFICATIONS:

length: Up to 18" (≈ 457 mm)


heights: Up to 5" (≈ 127 mm)

thickness: Average 1" (≈ 25 mm)

weight: Up to 13 lbs/ft² (≈ 63 kgs/m²)

corners: Available

METROPOLITAN

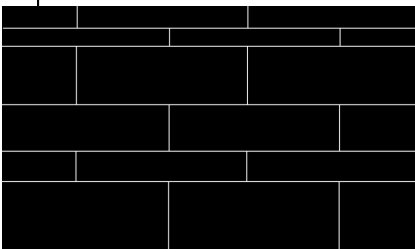

Black Rundle Split Face Limestone
Broadway Split Face Granite
Broadway Textured Granite
Cambrian Split Face Sandstone
Cambrian Textured Sandstone
Chinook Split Face Granite
Chinook Textured Granite
Kings Point Split Face Sandstone
Kings Point Textured Sandstone
WestCoast® Split Face Quartzite
WestCoast® Textured Quartzite
Yukon Split Face Marble
Yukon Textured Marble

GripSet® Technology
Installation Ready™
Sawn Cut 4 Sides

SPECIFICATIONS:

length: 24" (≈ 610 mm) Chinook Split Face 18" (≈ 457 mm)


heights, sold separately: 2", 4", 6", 8", 10"
($\approx 51, 102, 152, 203, 254$ mm)

thickness: Average 1" (≈ 25 mm)

weight: Up to 13 lbs/ft² (≈ 63 kgs/m²)

corners: Available

MICROLEEDGE

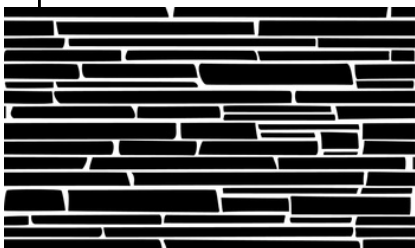

Westcoast® Quartzite

Installation Ready™
Split Face

SPECIFICATIONS:

length: Up to 12" (≈ 305 mm) plus fillers

heights: Up to 1-1/4" (≈ 32 mm) plus fillers

thickness: Average 1-1/4" (≈ 32 mm)

weight: Up to 13 lbs/ft² (≈ 63 kgs/m²)


corners: Available

PANGAEA®

THIN STONE VENEER

COLLECTIVE

QUARRY LEDGESTONE®

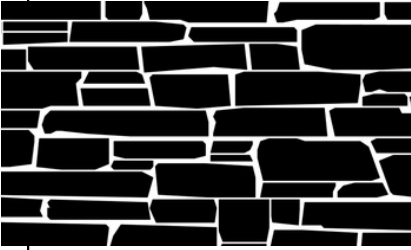


Chinook Granite
Coyote Sandstone
Kings Point Sandstone
Lancaster Quartzite
New England Schist
Providence Granite/Quartzite
Thunder Ridge Sandstone
Wolverine Quartzite

GripSet® Technology
Installation Ready™
Split Face

SPECIFICATIONS:

length: Up to 16" (≈ 406 mm) plus fillers
heights: Up to 8" (≈ 203 mm) plus fillers
Coyote, New England, Thunder Ridge: Up to 6" (≈ 152) plus fillers
thickness: Average 1-1/4" (≈ 32 mm)
weight: Up to 13 lbs/ft² (≈ 63 kgs/m²)
corners: Available

ROMAN CASTLESTONE

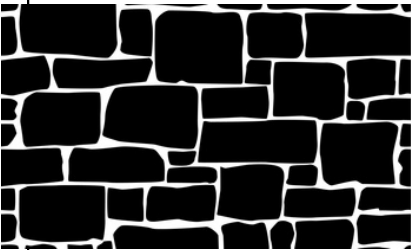


Chinook Granite
Kings Point Sandstone
Lancaster Quartzite
Sierra Ridge Schist

GripSet® Technology
Installation Ready™
Split Face

SPECIFICATIONS:

length: Up to 18" (≈ 457 mm) plus fillers
heights: Up to 12" (≈ 305 mm) plus fillers
thickness: Average 1" (≈ 25 mm)
weight: Up to 13 lbs/ft² (≈ 63 kgs/m²)
corners: Available

TERRAIN LEDGESTONE FORMFIT

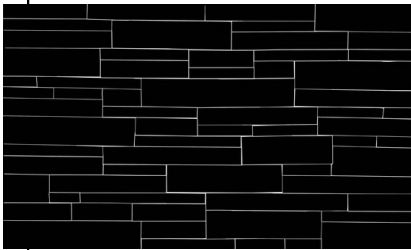

Black Rundle Limestone
Broadway Granite
Cambrian Sandstone
Chinook Granite
Copper Canyon Sandstone
Grigio Sandstone
Kings Point Sandstone
Lancaster Quartzite
New England Schist
Providence Granite/Quartzite
Tuscan Sandstone
WestCoast® Quartzite
Yukon Marble

GripSet® Technology
Installation Ready™
Sawn Cut 4 Sides FormFit

SPECIFICATIONS:

length: Up to 20" (≈ 508 mm)
heights: 1-1/2", 2-1/2", 4" ($\approx 38, 64, 102$ mm)
thickness: Average 1" (≈ 25 mm)
weight: Up to 13 lbs/ft² (≈ 63 kgs/m²)
corners: Available

